

# JW-HD120N

N-type

Bifacial Double Glass Mono Module


**375-395W**

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018: Occupational health and safety management systems

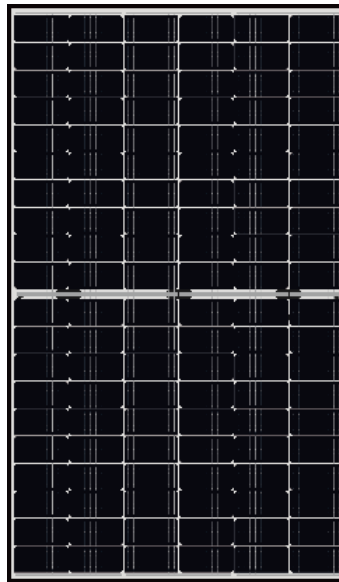

**395W**

Maximum Power Output

**21.65%**

Maximum Module Efficiency

**0~+5W**

Power Output Tolerance



## 10-30% Additional Power Generation

30 years lifespan brings 10-30% additional power generation comparing with conventional P-type module



## ZERO LID (Light Induced Degradation)

N-type solar cell has no LID naturally which can increase power generation



## Lower LCOE

Higher bifaciality, higher power output and lower BOS cost



## Better Weak Illumination Response

Higher power output even under low-light environments like on cloudy or foggy days



## Better Temperature Coefficient

Higher power generation under working conditions, thanks to passivating contact cell technology




## Wider Applicability

More application scenes like BIPV, vertical installation, snowfield, high-humid, windy and dusty area

## Jolywood Delivers Reliable Performance Over Time

- Leader of N-type bifacial manufacturer
- Full-automatic facility and industry-leading technology
- Best-in-class durability and reliability
- BNEF Tier One

## Linear Performance Warranty

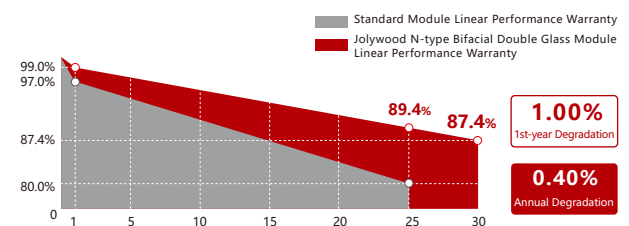

15 Years Product Material & Workmanship

30 Years Linear Performance Warranty

Memodo Customized Modules

# JW-HD120N Series | N-type Bifacial Double Glass Mono Module

## Electrical Properties | STC\*

| Testing Condition                            | Front Side | Front Side | Front Side | Front Side | Front Side |
|----------------------------------------------|------------|------------|------------|------------|------------|
| Peak Power (P <sub>max</sub> ) (W)           | 375        | 380        | 385        | 390        | 395        |
| MPP Voltage (V <sub>mp</sub> ) (V)           | 34.7       | 34.9       | 35.1       | 35.3       | 35.5       |
| MPP Current (I <sub>mp</sub> ) (A)           | 10.81      | 10.89      | 10.97      | 11.05      | 11.13      |
| Open Circuit Voltage (V <sub>oc</sub> ) (V)  | 41.6       | 41.8       | 42.0       | 42.2       | 42.4       |
| Short Circuit Current (I <sub>sc</sub> ) (A) | 11.45      | 11.54      | 11.62      | 11.69      | 11.77      |
| Module Efficiency (%)                        | 20.55      | 20.83      | 21.10      | 21.38      | 21.65      |

\*STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, AM1.5

The data above is for reference only and the actual data is in accordance with the practical testing  
Power Measurement Tolerance ±3%

## Electrical Properties | NOCT\*

| Testing Condition                            | Front Side | Front Side | Front Side | Front Side | Front Side |
|----------------------------------------------|------------|------------|------------|------------|------------|
| Peak Power (P <sub>max</sub> ) (W)           | 284        | 288        | 292        | 296        | 299        |
| MPP Voltage (V <sub>mp</sub> ) (V)           | 32.6       | 32.8       | 33.0       | 33.2       | 33.4       |
| MPP Current (I <sub>mp</sub> ) (A)           | 8.72       | 8.78       | 8.84       | 8.91       | 8.97       |
| Open Circuit Voltage (V <sub>oc</sub> ) (V)  | 39.8       | 40.0       | 40.1       | 40.3       | 40.5       |
| Short Circuit Current (I <sub>sc</sub> ) (A) | 9.23       | 9.30       | 9.37       | 9.43       | 9.49       |

\*NOCT: Irradiance 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1 m/s

## Operating Properties

|                                |                |
|--------------------------------|----------------|
| Operating Temperature (°C)     | -40°C~+85°C    |
| Maximum System Voltage (V)     | 1500V DC (IEC) |
| Maximum Series Fuse Rating (A) | 25             |
| Power Tolerance                | 0~+5W          |
| Bifaciality*                   | 80%            |

\*Bifaciality=P<sub>maxrear</sub> (STC) /P<sub>maxfront</sub> (STC) , Bifaciality tolerance:±5%

## Temperature Coefficient

|                                               |            |
|-----------------------------------------------|------------|
| Temperature Coefficient of P <sub>max</sub> * | -0.310%/°C |
| Temperature Coefficient of V <sub>oc</sub>    | -0.260%/°C |
| Temperature Coefficient of I <sub>sc</sub>    | +0.046%/°C |
| Nominal Operating Cell Temperature (NOCT)     | 42±2°C     |

\*Temperature Coefficient of P<sub>max</sub>±0.03%/°C

## Mechanical Properties


|                     |                                      |
|---------------------|--------------------------------------|
| Cell Size           | 166.00mm*83.00mm                     |
| Number of Cells     | 120pcs(12*10)                        |
| Module Dimension    | 1756mm*1039mm*30mm                   |
| Weight              | 23kg                                 |
| Front / Rear Glass* | 2.0mm/2.0mm                          |
| Frame               | Black frame/Anodized Aluminium Alloy |
| Junction Box        | IP68 (3 diodes)                      |
| Length of Cable     | 4.0mm <sup>2</sup> , 1.2m            |
| Connector           | MC4 Original                         |

\*Heat strengthened glass




## With Different Power Generation Gain (regarding 380W as an example)

| Power Gain (%) | Peak Power (P <sub>max</sub> ) (W) | MPP Voltage (V <sub>mp</sub> ) (V) | MPP Current (I <sub>mp</sub> ) (A) | Open Circuit Voltage (V <sub>oc</sub> ) (V) | Short Circuit Current (I <sub>sc</sub> ) (A) |
|----------------|------------------------------------|------------------------------------|------------------------------------|---------------------------------------------|----------------------------------------------|
| 10             | 410                                | 34.9                               | 11.75                              | 41.8                                        | 12.44                                        |
| 15             | 426                                | 34.9                               | 12.18                              | 41.8                                        | 12.89                                        |
| 20             | 441                                | 35.0                               | 12.61                              | 41.9                                        | 13.34                                        |
| 25             | 456                                | 35.0                               | 13.04                              | 41.9                                        | 13.79                                        |
| 30             | 471                                | 35.0                               | 13.47                              | 41.9                                        | 14.24                                        |

## Engineering Drawing (unit: mm)

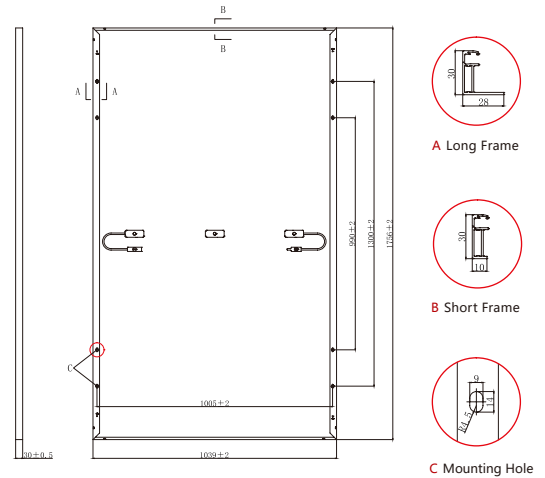

## Characteristic Curves | HD120N-380

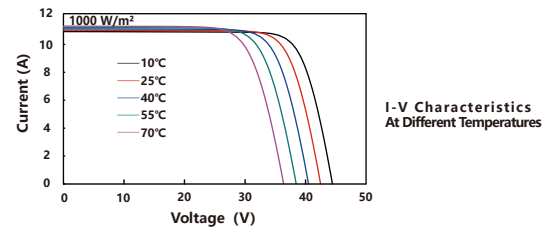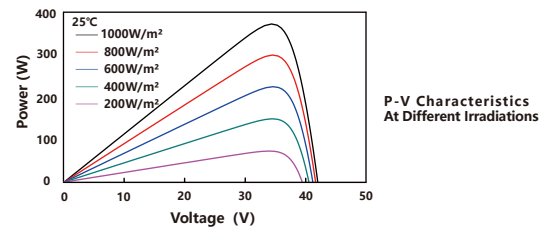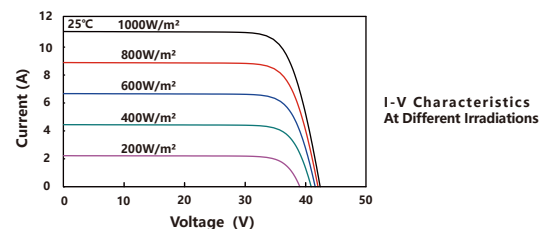

## Packaging Configuration

| Packing Type     | 20'GP | 40'GP | 40'HQ |
|------------------|-------|-------|-------|
| Piece/Pallet     |       | 36    |       |
| Pallet/Container | 6     | 13    | 26    |
| Piece/Container  | 216   | 468   | 936   |

\*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Jolywood (Taizhou) Solar Technology Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

www.jolywood.cn



Add: No.6 Kaiyang Rd., Jiangyan Economic Development Zone,  
Taizhou, Jiangsu Province, China, 225500

TEL: +86 523 80612799

Email: mkt@jolywood.cn

